


# UV Roll To Roll Printer

4/5/6 Colors | White & Varnish

2/3/4 Ricoh Gen5 Heads | Variable Dot

INDUSTRIAL GRADE

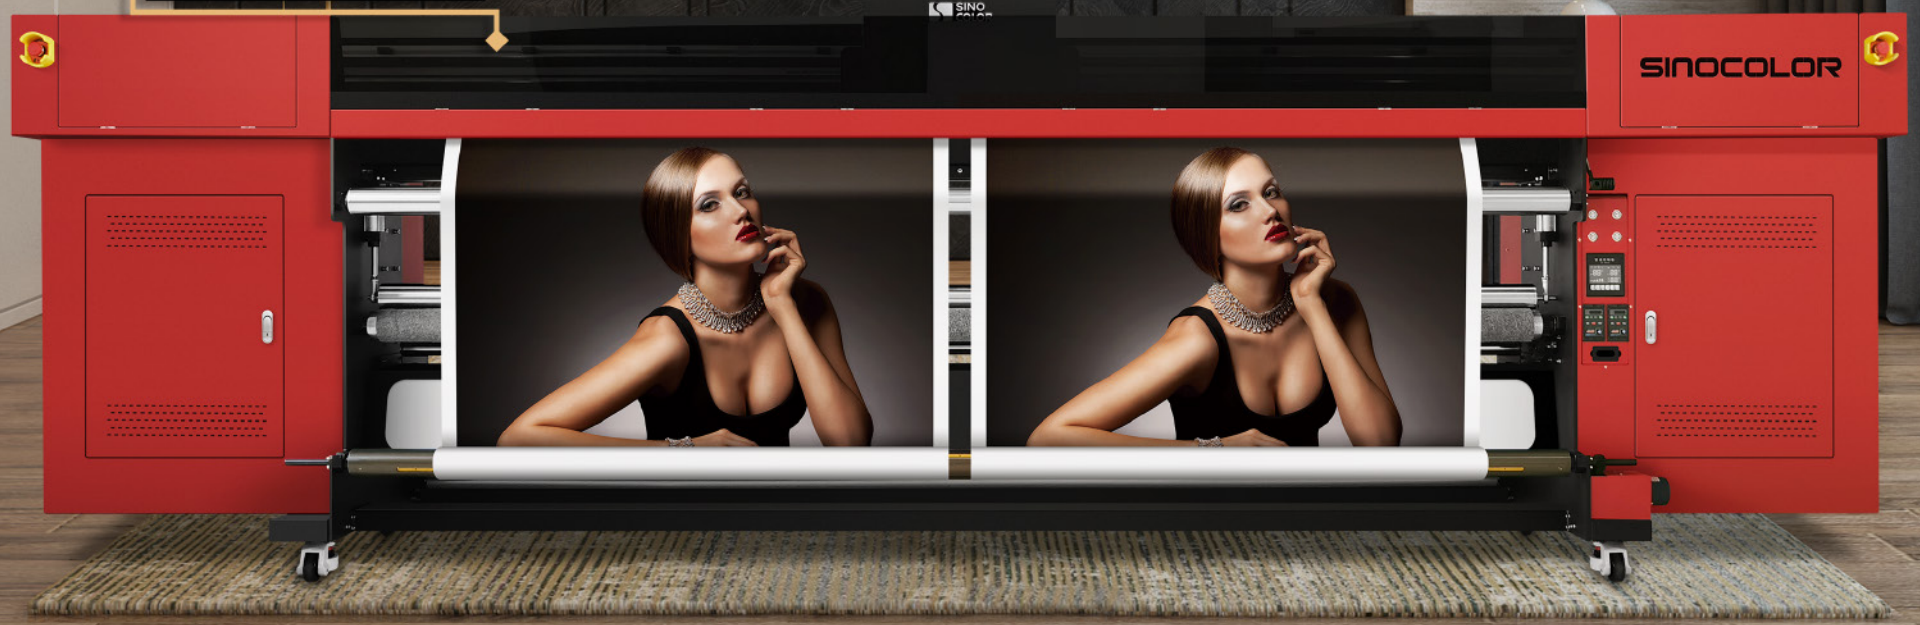


## ● Features 特点



### Ricoh Gen5 Printhead.

It is designed with longevity and robustness in mind and widely used in many latest industrial inkjet printers.


理光Gen5打印碰头，它的设计考虑到工业使用所需求的寿命和坚固性



### Material Tension System

Tension media feeding system is standard equipped to guarantee the high accuracy of material stepping.

张力放布系统。保障高精度步进。



### Negative Pressure System

Two advanced separate negative pressure systems. Simply and effectively ensure the continuous ink flow, and easy maintenance for multi-heads equipment.


配置高级的负压系统。稳定供墨，简化多头设备维护。



### Dual guide rail

Dual guide rail configuration, guarantee the stability of long time running.

双导轨设计，提高设备长时间运行的稳定性



### Anti-collision System

Printer will automatically stop when the carriage hit any unexpected object during working, and support continuing printing from the interruption part, reduce the material waste.

小车遇撞击自动停止，并支持中断处续打，减少意外带来的材料浪费

- ★ Well-designed tension type material feeding and take-up system. Ensure the high accuracy of material stepping.

精心设计的张力收放布系统，精确走步

- ★ Mature time-set stirring system for white ink, effectively decrease the problems caused by white ink precipitation.

成熟的白墨定时搅拌装置，有效防止UV白墨沉淀

- ★ Elegant and sleek appearance design, not only an advanced printing equipment, but also a decoration for the company.

简约大气的外观设计



## ● Specification 参数

Model No.	型号	UR-3200R	UR-2000R
Printing Head	打印喷头	2/3/4 Ricoh Gen5 Heads	
Resolution	打印精度	1200 DPI	
Media 耗材	Width 耗材宽度	3200 mm Max	2000 mm Max
	Type 耗材种类	Canvas, Garment, Leather, PET Film, Reflective Film, Soft Ceiling Film & More Flexible Material Etc. 天花软膜、灯布、车贴、服装、皮革、PET膜、反光膜以及其他众多卷材	
Ink 墨水	Type 墨水类型	UV Ink	
	Color 墨水颜色	CMYK/CMYK+W / CMYK+W+V	
	Curing 墨水固化	High Quality Whater Cooling UV-LED Lamp 水冷UV-LED灯	
Speed 速度	Color Mode 颜色模式	CMYK, 4 Heads	
	Draft 草图模式	30 m <sup>2</sup> /h	23 m <sup>2</sup> /h
	Production 标准模式	21 m <sup>2</sup> /h	16 m <sup>2</sup> /h
	Quality 精细模式	17 m <sup>2</sup> /h	13 m <sup>2</sup> /h
Ink Supply System	供墨系统	Two advanced separate negative pressure systems (One for color and varnish, One for white).	
Cleaning	清洗系统	Automatic Cleaning, Anti-Clogging Flash Function & Capping System 自动清洗、闪喷、封喷头	
Feed & TakeUp	收放布	Automatic Media Feeding (Standard) & Take up System (Optional) 自动收放布	
Rip Software	操作软件	Photoprint	
Connector	连接方式	USB 3.0	
Power	电力消耗	AC 110V / 220V ± 5%, 16A, 50/60Hz ± 1, 1500W MAX	
Size 尺寸	Machine 机器尺寸	L5170 x W920 x H1710 mm	L3770 x W920 x H1710 mm
	Packing 包装尺寸	L5270 x W1020 x H1940 mm	L3870 x W1020 x H1940 mm
Weight 重量	Machine 机器重量	1000 KG	850 KG
	Packing 机器重量	1300 KG	1100 KG

Specifications are subject to change without notice. 以上参数可能随机器版本改变，请以厂家最新数据为准。