

Direct Textile Printer

for Flag Polyester/Cotton Material

旗帜布/纯棉直喷一体机

Epson Official i3200 Heads

爱普生i3200喷头

1.8m / 3.2m


1.8米 / 3.2米

Integrated Design

一体式设计

Professional

专业

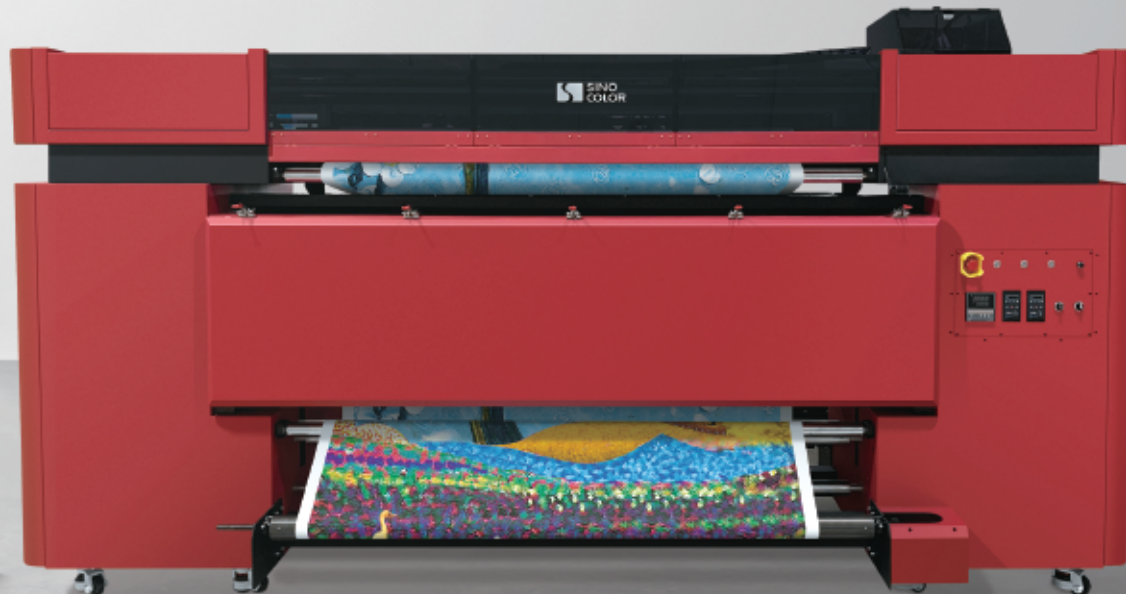



● Features 特点



Epson Official Supplied i3200 Printheads

Two or four heads optional. The speed and quality are guaranteed.


配备Epson原装i3200喷头，速度与品质的保证



Integrated Design

The professional integrated design of printer part and heater part guaranteed the high accuracy of media stepping

一体化的设计，保证了精准的材料步进



Tension Type Media Feeding and Take-up System

Apply to material with different elasticity.


标配材料张力系统，可适应不同弹力的材料稳定走布



Anti-collision system

Printer will automatically stop when the carriage hit any unexpected object. And support to continue printing. Reduce the material waste.

防撞系统，当平台出现异物或者打印材料翘起阻挡小车移动，设备会自动暂停并支持断点续打避免额外的材料浪费



Variable Sized Droplet Technology

Ensure the smooth color gradations and high quality output.

可变墨滴技术。使打印画面的颜色过渡更自然，实现高质量成像。

● Specification 参数

Model No.		产品型号	FP-740P	FP-740S	FP-1260P	FP-1260S
Printhead 喷头	Type	喷头类型	2 x Epson i3200	4 x Epson i3200	2 x Epson i3200	4 x Epson i3200
	Nozzles	喷嘴数量	3200 Nozzles Per Head			
	Height	高度调节	2-8mm Above Media Adjustable			
Max Printing Width		打印尺寸	1.8m		3.2m	
Resolution (dpi)		打印精度	1440 dpi			
Media Types		适应耗材	Polyester (For flag, display board, light box, etc) 涤纶(用于旗帜、展示板、灯箱等)			
Ink 墨水	Type	墨水类型	Dye Sublimation Ink 热升华墨水			
	Color	墨水颜色	CMYK			
	Droplet	墨滴大小	1.5 – 21pl Variable			
Speed 速度	Draft	标准模式	80 sqm/h	150 sqm/h	96 sqm/h	180 sqm/h
	Production	精细模式	40 sqm/h	75 sqm/h	48 sqm/h	90 sqm/h
	Quality	照片模式	25 sqm/h	50 sqm/h	30 sqm/h	60 sqm/h
Feed & take up		收放布系统	Automatic Tension Type Media Feeding & Take-up System (Standard)			
Cleaning		清洗系统	Automatic Cleaning, Anti-Clogging Flash Function & Capping System 自动清洗, 闪喷, 封喷头			
Fabric Drying System		干燥系统	Infrared Heater			
Environment		工作环境	Temperature: 20-28 °C, Humidity: 40%-60%			
Rip Software		图像处理	Maintop/ Photoprint (Optional)			
Control Software		控制软件	SinoColor Print Console			
Interface		输入接口	USB 3.0			
Operation System		操作系统	Windows 7 / XP / 10			
Power		电源消耗	Machine 50 / 60HZ, 110 / 220V			

Specifications are subject to change without notice. 以上参数可能随机器版本改变，请以厂家最新数据为准。