

DTF T-SHIRT PRINTING

— Solution A —

60cm with 2 Epson i3200 Printheads




MACHINE WORKING PROCEDURE



STEP 1
Design one file



STEP 2
Print on the PET film

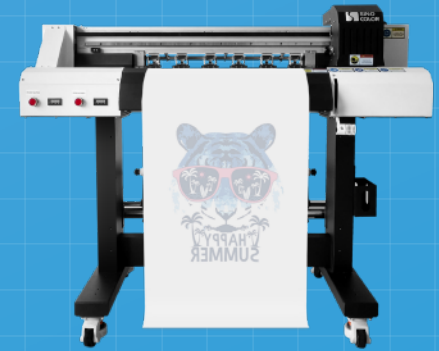

STEP 4
Heat transferring



STEP 3
Powder treating



WJ-240S

● Features




60cm mini roll to roll printer
Easy to find space for it in the office, and extend the business to new area

小尺寸，空间需求小，方便拓展新业务




High Precision Platform
With SinoColor high precision aluminum platform, the stable and consistent print quality are thus guaranteed

高精度打印平台
采用铝合金材质，确保打印质量



Variable Dot Print Technology
Permitting the printer to provide smooth gradations, exceptional solid colors and optimum image quality in all print modes

可变墨滴技术
使打印画面的颜色过渡更加自然，实现高质量成像



Free ICC Profiles
The SinoColor support provides a batch of free icc profiles for different major media and inks

标配多种ICC配置文件
节省配置时间，以便尽快进入生产



1 Year or longer Warranty
The standard warranty period on average is one year. However, SinoColor would like to offer extra warranty period (conditions apply)

1年或更长的保修期
儒彩提供超长的保修期（特定前提）

★ New look has heavier, larger structure, and wider printing platform
新造型更加厚重大气，更宽的打印平台

★ Dual feeding bar for loading heavy media
双送纸杆，以承受更重的耗材

★ Optional infrared heater for drying prints quickly
选配红外加热装置，画面极速烘干



● Specification

Model No.	型号	WJ-240S
Printhead	喷头	2 × Epson i3200
Resolution	精度	2400dpi max
Ink Color	色彩	C M Y K + White
Media 耗材	Size 尺寸	60cm
	Types 种类	PET Film
Speed 速度	4 Pass 标准	10 sqm/h
	6 Pass 精细	6 sqm/h
	8 Pass 照片	4 sqm/h
Ink Type	墨水	Pigment Ink
Ink Droplet	墨滴	1.5-21pl variable
Cleaning	清洗	Automatic Cleaning, Anti-Clogging Flash Function & Capping System
Feed & take up	收放布	Automatic Media Feeding (Standard) & Take up System (Standard)
Environment	环境	Temperature: 20-28 °C, Humidity: 40%-60%
Rip Software	软件	Maintop / Photoprint
Interface	接口	USB 3.0
Power	电源	Machine 50/60HZ, 110 / 220V

Specifications are subject to change without notice. 以上参数可能随机器版本改变，请以厂家最新数据为准。

POWDER TREATING MACHINE

● Product Detail



● Specification

Media Width	0-600mm
Application	Nylon, chemical fiber, cotton, leather, swimsuit, diving suit, PVC, EVA, etc.
Powder Treating Control	The direction and amount of powder scattering and shaking is adjustable
Heating & Drying	High power & high efficiency heating system

Media Feeding Mode	Vacuum belt type platform
Media Take-up	Auto media take-up system (Standard)
Power	Machine 50/60HZ, 110/220V, 5.22KW
Size	Machine : 1985 × 1090 × 1080mm Packing : 1900 × 1140 × 1134mm